


# Strobe light, grill 12/24V

## Instruction manual

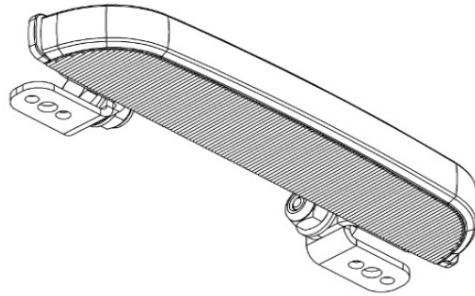

### FEATURES

- Two angled and two flat mounting brackets for quick and easy installation.
- Operating voltage 10~30 VDC
- 14 flash patterns

### OPERATING INSTRUCTION

- Connect RED wire to + VDC – Fuse @2A.
- Connect BLACK wire to chassis ground.
- Tap BLUE wire to BLACK wire quickly to select next flash pattern.
- Tap BLUE wire to BLACK wire for more than 5 sec. to turn the unit off.

### SYNCHRONISED FLASH

- Connect YELLOW wires of all units together and set all units to the required synchronised pattern.

## ALTERNATE FLASH

- Connect YELLOW wires of all units together and set all units to either phase 1 or phase 2 of that alternate pattern. Units set on phase 1 will alternate with units set on phase 2.

## FLASH PATTERN

|      |                                |
|------|--------------------------------|
| PA1  | ECE R65 120FPM Single Flash P1 |
| PA2  | ECE R65 120FPM Single Flash P2 |
| PA3  | ECE R65 120FPM Double Flash P1 |
| PA4  | ECE R65 120FPM Double Flash P2 |
| PA5  | ECE R65 120FPM Quad Flash P1   |
| PA6  | ECE R65 120FPM Quad Flash P2   |
| PA7  | Single Flash 75 (SIM) P1       |
| PA8  | Single Flash 75 (SIM) P2       |
| PA9  | Double Flash 75 (SIM) P1       |
| PA10 | Double Flash 75 (SIM) P2       |
| PA11 | Quad Flash 75 (SIM) P1         |
| PA12 | Quad Flash 75 (SIM) P2         |
| PA13 | Steady                         |
| PA14 | Off                            |